

防止飛散光管





特性：

光管中心層內加上一層"樹脂膜"，有效地鎖緊光管內之玻璃管，令一旦不小心打破時，管內層之玻璃管亦不會飛散，以致傷及他人。


適用：

食品加工場，酒樓、醫院、廚房、電腦工業、化驗所。

燈座(Lamp base)

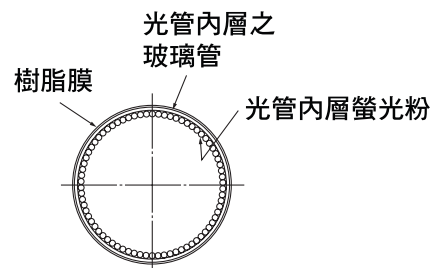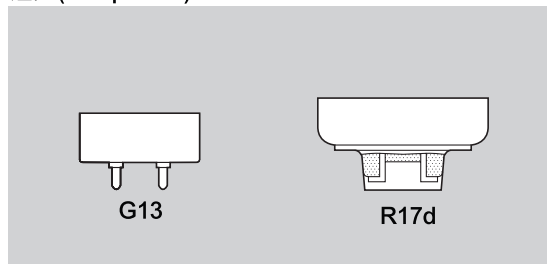

電磁波頻譜圖(Spectral energy distribution graphs)

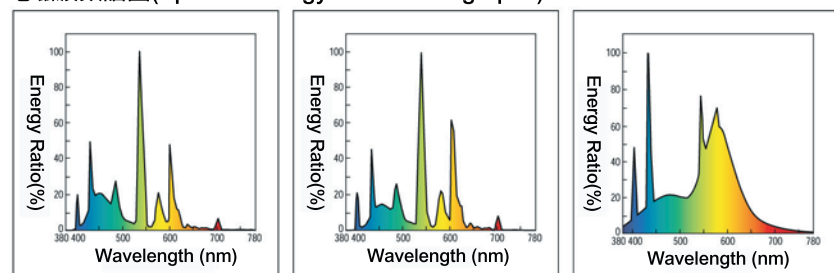

EX-D：三基色白光

EX-N：三基色天然光

W：日光

產品型號	標準包裝 (支/箱)	色溫 (K)	尺寸(mm)		重量 (g)	燈座	輸出 功率 (w)	電流 (A)	流明 (lm)	演色度 (Ra)	平均壽命 (小時)
			管徑	管長							
經濟型											
FL36T8 EX-D SP	25	6,500K	25.5	1,198	198	G13	36	0.430	3,250	84	18,000

普通型

FL20SS EX-N/18P-H-A	5	5,000K	28	580	112	G13	18	0.350	1,430	84	8,500
FL20SS EX-N/18P-H	25	5,000K	28	580	112	G13	18	0.350	1,430	84	8,500
FL40SS EX-N/37P-H-A	5	5,000K	28	1,198	216	G13	37	0.410	3,450	84	12,000
FL40SS EX-N/37P-H	25	5,000K	28	1,198	216	G13	37	0.410	3,450	84	12,000

快速起動型

FLR40S EX-N/M/36 P-H-A	5	5,000K	32.5	1,198	244	G13	36	0.440	3,340	84	12,000
FLR40S EX-N/M/36 P-H	25	5,000K	32.5	1,198	244	G13	36	0.440	3,340	84	12,000
FLR40S W/M/36 P	25	4,200K	32.5	1,198	244	G13	36	0.440	2,910	61	12,000
FLR40S W/M/36 P-A	5	4,200K	32.5	1,198	244	G13	36	0.440	2,910	61	12,000
FLR40S W/M P	25	4,200K	32.5	1,198	244	G13	40	0.420	2,910	61	12,000
FLR40S W/M P-A	5	4,200K	32.5	1,198	244	G13	40	0.420	2,910	61	12,000
FLR110H EX-N/A/100 P-H	10	5,000K	38	2,367	610	R17d	100	0.820	8,940	84	12,000
FLR110H W/A/100P	10	4,200K	38	2,367	610	R17d	100	0.820	8,690	61	12,000

高頻率型支架專用

FHF32EX-D P-H	25	6,700K	25.5	1,198	198	G13	32	0.255	3,070	84	12,000
							45	0.425	4,310		
FHF32EX-N P-H	25	5,000K	25.5	1,198	198	G13	32	0.255	3,260	84	12,000
							45	0.425	4,580		



富新工程有限公司
ENGINEERING Fu Sun Engineering Limited

香港北角七姊妹道208號昌利大廈3樓302室
Room 302, 3/F, Cheong Lee Building,
No. 208 Tsat Tsz Mui Road, North Point, HK.

電話: (852)2570-8193

傳真: (852)2571-3150

電郵: enquiry@fusun-toshiba.com

網址: www.fusun-toshiba.com

中國熱線:

電話: (86) 135-60702932