


TOSHIBA 東芝


高顯色性光管



燈座(Lamp base)

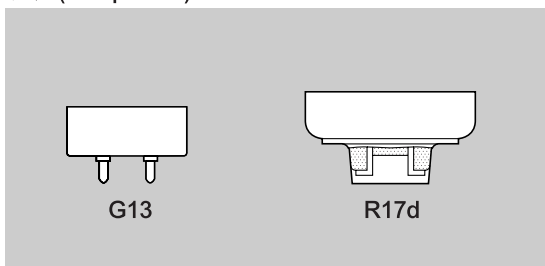

電磁波頻譜圖(Spectral energy distribution graphs)

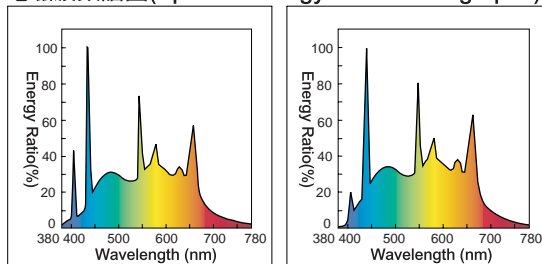


產品型號	標準包裝 (支/箱)	色溫(K)	尺寸(mm)		重量 (g)	燈座	輸出 功率 (w)	電流 (A)	流明 (lm)	演色度 (Ra)	平均壽命 (小時)
			管徑	管長							

普通型

FL10N-SDL	10	5,000K	25.5	330	58	G13	10	0.230	360	90	6,000
FL20S•N-SDL	25	5,000K	32.5	580	128	G13	20	0.360	910	90	8,500
FL20S•N-SDL•NU	25	5,000K	32.5	580	128	G13	20	0.360	850	90	7,500
FL30S•N-SDL	25	5,000K	32.5	630	136	G13	30	0.610	1,320	90	8,500
FL32S•N-SDL•NU	25	5,000K	32.5	830	183	G13	32	0.435	1,460	90	10,000
FL40S•N-SDL	25	5,000K	32.5	1,198	244	G13	40	0.420	2,400	90	12,000
FL40S•N-SDL•NU	25	5,000K	32.5	1,198	244	G13	40	0.420	2,200	90	10,000

快速起動型

FLR20S•N-SDL/M	25	5,000K	32.5	580	128	G13	20	0.360	880	90	8,500
FLR40S•N-SDL/M	25	5,000K	32.5	1,198	244	G13	40	0.420	2,380	90	12,000
FLR40S•N-SDL/M•A•NU	25	5,000K	32.5	1,198	244	G13	40	0.420	2,040	90	10,000
FLR40S•N-SDL/M•NU	25	5,000K	32.5	1,198	244	G13	40	0.420	2,180	90	10,000
FLR110H•N-SDL/A	10	5,000K	38	2,367	610	R17D	110	0.800	6,680	90	12,000



富新工程有限公司
ENGINEERING Fu Sun Engineering Limited

香港北角七姊妹道208號昌利大廈3樓302室
Room 302, 3/F, Cheong Lee Building,
No. 208 Tsat Tsz Mui Road, North Point, HK.

電話: (852)2570-8193
電郵: enquiry@fusun-toshiba.com
網址: www.fusun-toshiba.com

傳真: (852)2571-3150

中國熱線: (86) 135-60702932