


防振燈泡




特色：
具防振設計，能承受振動及衝擊。

燈座(Lamp base)

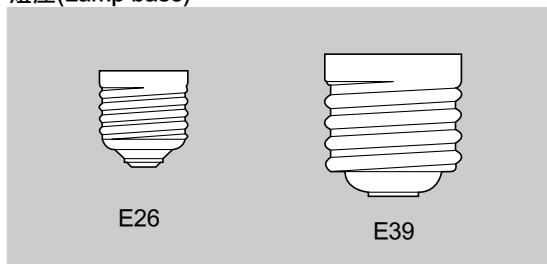

產品型號	標準包裝 (支/箱)	球形	管徑 (mm)	管長 (mm)	重量 (g)	燈座	輸出 功率 (w)	流明 (lm)	色溫 (k)	平均 壽命 (小時)
TAI 110V 20WE	25	PS	55	98	30	E26	20	140	2,650	2,000
TAI 110V 40WE	25	PS	55	98	31	E26	40	330	2,650	2,000
TAI 110V 60WE	25	PS	60	109	32	E26	60	590	2,650	2,000
TAI 110V 100WE	25	A	70	136	46	E26	100	1,250	2,650	2,000
TAI 110V 200WE	20	PS	80	165	50	E26	200	2,940	2,650	2,000
TAI 220V 20WE	25	PS	55	98	30	E26	20	140	2,650	2,000
TAI 220V 40WE	25	PS	60	109	32	E26	40	290	2,650	2,000
TAI 220V 60WE	25	PS	60	109	32	E26	60	430	2,650	2,000
TAI 220V 100WE	25	A	70	136	46	E26	100	860	2,650	2,000
TAI 220V 200WE	20	PS	80	165	50	E26	200	2,340	2,650	2,000
TAI 110V 300WPSE	15	PS	95	213	90	E39	300	4,650	2,650	2,000
TAI 220V 300WPSE	15	PS	95	213	90	E39	300	3,810	2,650	2,000



富新工程有限公司
ENGINEERING Fu Sun Engineering Limited

香港北角七姊妹道208號昌利大廈3樓302室
Room 302, 3/F, Cheong Lee Building,
No. 208 Tsat Tsz Mui Road, North Point, HK.

電話: (852)2570-8193 傳真: (852)2571-3150

電郵: enquiry@fusun-toshiba.com

網址: www.fusun-toshiba.com

中國熱線: (86) 135-60702932